


Proj:

TAG:

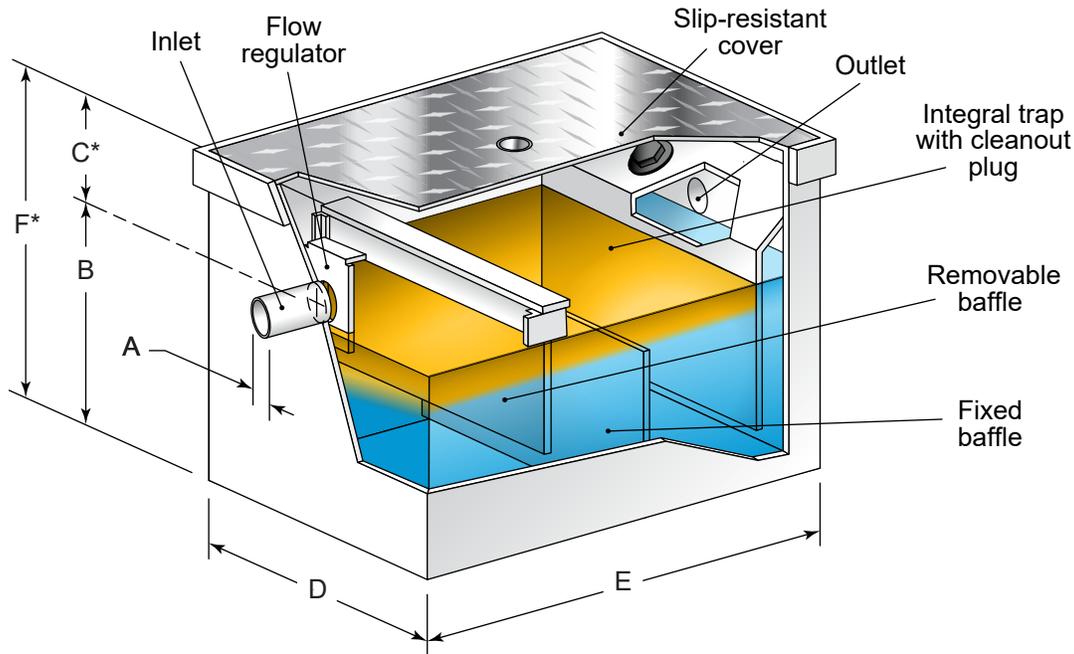

Models	Capacity Guspm [LPM]	Grease Capacity LB. [kg]	Wall Thickness in [mm]	A Inlet and outlet	B Bottom to center in [mm]	C* Center to top in [mm]	D Width in [mm]	E Length in [mm]	F* Height in [mm]		
<input type="checkbox"/> CA-SG10	10 [38]	20 [9.0]	1/2 [13]	DN 2 in.	8 1/2 [216]	6 [152]	14 [356]	17 [432]	14 1/2 [368]	MEETS STANDARDS	
<input type="checkbox"/> CA-SG15	15 [57]	30 [13.6]	1/2 [13]	DN 2 in.	10 [254]	6 [152]	17 [432]	19 [483]	16 [406]		
<input type="checkbox"/> CA-SG20	20 [76]	40 [18.1]	1/2 [13]	DN 3 in.	12 [305]	6 [152]	20 [508]	24 [610]	18 [457]		
<input type="checkbox"/> CA-SG25	25 [95]	50 [22.7]	1/2 [13]	DN 3 in.	14 [356]	6 [152]	20 [508]	24 [610]	20 [508]		
<input type="checkbox"/> CA-SG35	35 [132]	70 [31.7]	1/2 [13]	DN 4 in.	15 [381]	6 [152]	25 [635]	28 [711]	21 [533]		
<input type="checkbox"/> CA-SG50	50 [189]	100 [45.3]	1/2 [13]	DN 4 in.	17 [432]	6 [152]	25 [635]	28 [711]	23 [584]		
<input type="checkbox"/> CA-SG75	75 [284]	150 [67.5]	3/4 [19]	DN 4 in.	19 [483]	6 [152]	29 [737]	31 [787]	25 [635]		
<input type="checkbox"/> CA-SG100	100 [378]	200 [90.0]	3/4 [19]	DN 4 in.	23 [584]	10 [254]	34 [864]	43 [1092]	33 [838]		
<input type="checkbox"/> CA-SG150	150 [568]	300 [135]	3/4 [19]	DN 4 in.	25 [635]	10 [254]	42 [1067]	56 [1422]	35 [889]		**
<input type="checkbox"/> CA-SG200	200 [757]	400 [181]	3/4 [19]	DN 4 in.	30 [762]	10 [254]	44 [1118]	61 [1549]	40 [1016]		**
<input type="checkbox"/> CA-SG250	250 [946]	500 [227]	3/4 [19]	DN 4 in.	36 [914]	10 [254]	52 [1321]	71 [1803]	46 [1168]	**	
<input type="checkbox"/> CA-SG300	300 [1136]	600 [272]	3/4 [19]	DN 6 in.	39 [990]	10 [254]	53 [1346]	76 [1930]	49 [1245]	**	

Note: Larger capacity available on request. ** CSA B481 approval is not necessary for models with more than 100 gallons per minute (GPM)

DESCRIPTION

Recessed polypropylene grease interceptor including a removable baffle and a flow regulator, integral trap with cleanout plug, fixed baffle retaining solids, bolted slip-resistant aluminium cover with neoprene gasket.

OPTIONS

- DG** Grease detecting system with control panel (not available for SG10, 15 & 20)
- DG-CS** Dry contact grease detecting system (not available for SG10, 15 & 20)
- E** Extension (C ___ and F measurement will be adjusted accordingly)
- SBG** Grease biodegradation system
- CES** Superior seal frame/cover
- CR** Reinforced cover
- CRG** Galvanized reinforced cover
- RS** Suction connection
- RS(2)** 2 Suction connections
- BA** Anchor flange