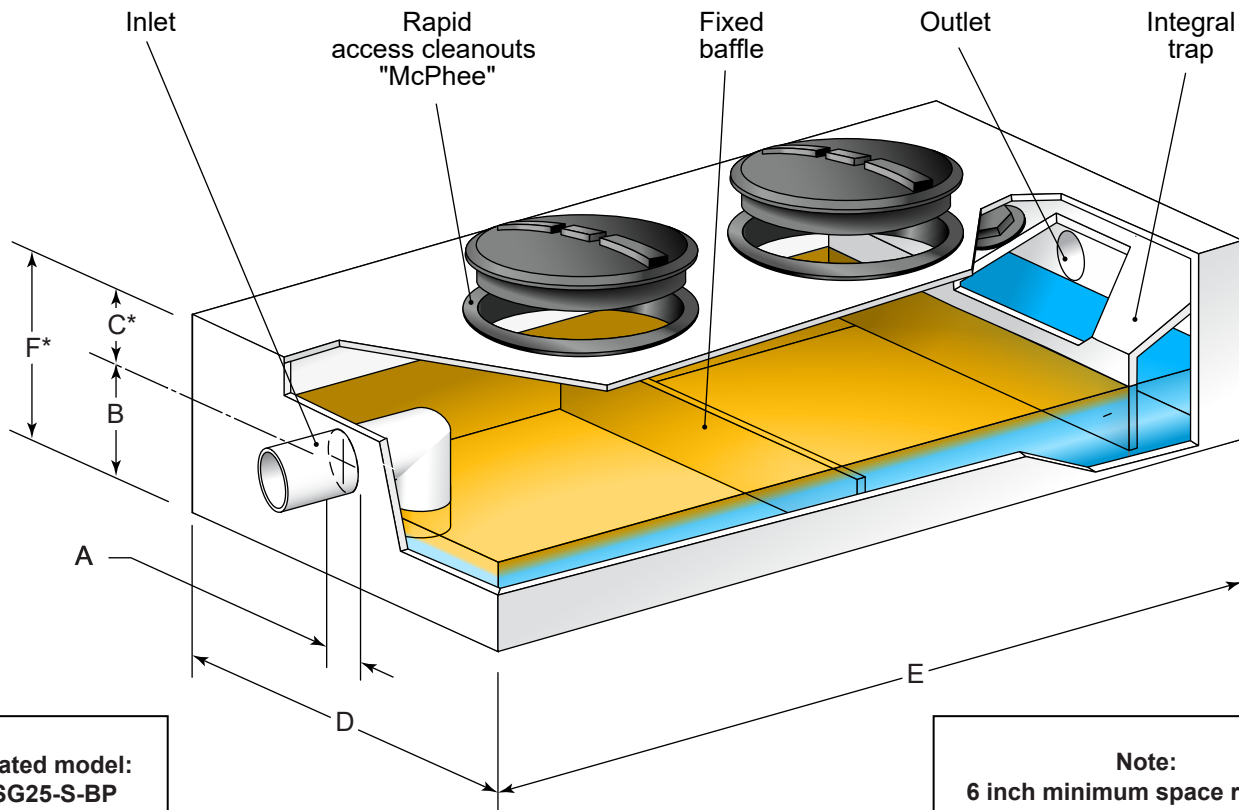



 Illustrated model:
 CA-SG25-S-BP

Note:
 6 inch minimum space required
 between top of interceptor and
 bottom counter.

Models	Flow rate Guspm [LPM]	Grease capacity LB [kg]	Wall thickness in [mm]	A Inlet and outlet	B Bottom to center in [mm]	C* Center to top in [mm]	D Width in [mm]	E Length in [mm]	F* Height in [mm]
CA-SG10-S-BP	10 [38]	20 [9.0]	1/2 [13]	DN 2 in	8 [203]	6 [152]	18 [457]	14 [356]	14 [356]
CA-SG15-S-BP	15 [57]	30 [13.6]	1/2 [13]	DN 2 in	8 [203]	6 [152]	18 [457]	23 [584]	14 [356]
CA-SG20-S-BP	20 [78]	40 [18.1]	1/2 [13]	DN 3 in	8 [203]	6 [152]	18 [457]	43 [1092]	14 [356]
CA-SG25-S-BP	25 [95]	50 [22.7]	1/2 [13]	DN 3 in	8 [203]	6 [152]	18 [457]	51 [1295]	14 [356]

Note: Larger capacity available on request. * Dimension "C" can vary according to needs and dimension "F" will be modified in consequence.

DESCRIPTION

Low-profile copolymere polypropylene grease interceptor for above-ground installation, including integral trap with cleanout plug, fixed baffle retaining solids, and 1 or 2 rapid access cleanouts "McPhee" depending on the model.

OPTIONS

- ☐ **DG** Grease detector and control panel
- ☐ **SBG** Grease biodegradation system
- ☐ **RS** Suction connection